

Robertshaw®

**UNITROL®
7000 LC
710 SERIES**

**LOW
CAPACITY
GAS VALVES**



Specifications

- Range of regulation adjustment:
 - 3.0" to 5.0" WC Natural Gas
 - 8.0" to 12.0" WC LP
- Straight-line regulation
- Maximum operating pressure is 0.5 PSI
- Outlet positions and sizes: straight out, 90° angles $\frac{3}{8}$ ", $\frac{1}{2}$ " NPT and BSP and $\frac{1}{2}$ " NPT and BSP inverted flare
- Inlet positions and sizes: straight in $\frac{3}{8}$ " and $\frac{1}{2}$ " NPT and BSP
- Electrical rating: millivolt, 12 VDC, 24 VAC, 120 VAC, 240 VAC
- Ambient temperature ratings: -40°F to + 175°F (-40°C to 80°C)
- Agency Certification Numbers
 - CE 0085
 - IAS (#L2755010)
 - UL (#MH7925) certifications and seal for commercial cooking


The Robertshaw® Unitrol 7000 low capacity (LC) models have a control body of extremely compact size. A variety of operators make this control field upgradable for various applications. The valve's optional inlet sizes plus optional outlet sizes and positions enable this control to be used in very limited space applications such as gas log fireplaces, recreational vehicle heaters, commercial cooking and other lower capacity applications.

Features and Benefits

- Low Capacity (LC) compact size
- Outlet Screen
- Pressure taps for checking inlet and outlet gas pressure (optional)
- Convenient $\frac{1}{4}$ " and $\frac{3}{16}$ " spade connectors to prevent mis-wiring
- Multi-position mounting. Any angle between 0° and 90° from upright
- Pilot gas filters
- Field upgradable
- Pilot capacity 2CFH



An ISO 9001 – 2008 Certified Company


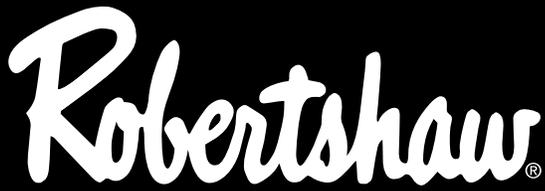


**UNITROL®
7000 LC
710 SERIES**

**LOW
CAPACITY
GAS VALVES**

PRODUCT DIMENSIONS


Dimensions are inches and [millimeters].

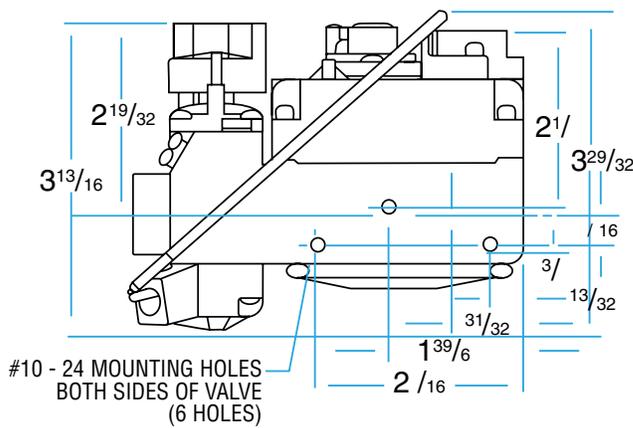

REGULATION CAPACITIES

Factory Model	Inlet x Outlet"	Natural Gas BTU @ 1" WC PD	Natural Gas Min - Max BTU Capacity	LP BTU @ 1" WC PD	LP Min - Max BTU Capacity
7000 HC	3/8 x 3/8	40,000	5,000 - 70,000	65,000	5,000-110,000
7000 LC	1/2 x 1/2	40,000	5,000-70,000	65,000	5,000-110,000

OUTLET PRESSURE DROP CURVE

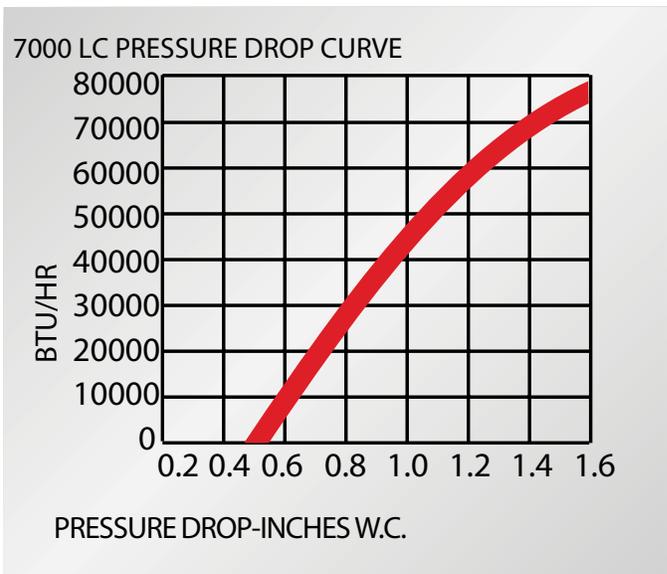

Customer Service Telephone 1.800.304.6563
Customer Service Facsimile 1.800.426.0804
HVACCustomerService@robertshaw.com

For Technical Service
Telephone 1.800.445.8299
Facsimile 1.630.260.7294
TechnicalService@robertshaw.com

Robertshaw® and Uni-Line® are trademarks of Robertshaw, its subsidiaries and/or affiliated companies. All other brands mentioned may be the trademarks of their respective owners.

www.robertshaw.com
www.Uni-Line.com
©2014 Robertshaw
09/14 – 150-2374 RevB